



- Sturdy and compact design
- Up to 2500 ppr
- 4.75 V ... 30 V with short-circuit proof push-pull output

Product description

The RVI50 is characterised by its small housing diameter of 50 mm with equal technical data compared to other encoder series.

The centering shoulder makes it possible to fit the unit very precisely. In addition to the three M3 holes, the encoder has a servo infeed on the circumference. This allows you to make a slight adjustment to the reference point of the incremental rotary encoder by turning the housing.

The clamping element that grips into the servo infeed ensures that the incremental rotary encoder stays firmly in place without slipping out of adjustment.

The pulse disk is designed in plastic up to 600 pulses. Beyond that, glass is used.

RVI50N-09B**A*T



Technical data

General specifications

Detection type	photoelectric sampling
Pulse count	max. 2500

Electrical specifications

Operating voltage U_B	4.75 ... 30 V DC
No-load supply current I_0	max. 80 mA

Output

Output type	push-pull, incremental
Voltage drop U_d	< 4 V
Load current	max. per channel 40 mA , short-circuit protected
Output frequency	max. 160 kHz
Rise time	250 ns
De-energized delay t_{off}	250 ns

Connection

Connector	type 9416, 12-pin
Cable	Ø6 mm, 5 x 0.38 mm ² , 0.5 m

Standard conformity

Protection degree	DIN EN 60529, IP50
Climatic testing	DIN EN 60068-2-3, no moisture condensation
Emitted interference	DIN EN 61000-6-4
Noise immunity	DIN EN 50082-2
Shock resistance	DIN EN 60068-2-27, 100 g, 3 ms
Vibration resistance	DIN EN 60068-2-6, 10 g, 10 ... 2000 Hz

Ambient conditions


Operating temperature	
Glass disk	-20 ... 70 °C (-4 ... 158 °F)
Plastic disk	-20 ... 60 °C (-4 ... 140 °F)
Storage temperature	
Glass disk	-40 ... 70 °C (-40 ... 158 °F)
Plastic disk	-40 ... 60 °C (-40 ... 140 °F)

Mechanical specifications

Material	
Housing	powder coated aluminum
Flange	3.1645 aluminum
Shaft	Stainless steel 1.4305 / AISI 303
Mass	approx. 220 g
Rotational speed	max. 10000 min ⁻¹
Moment of inertia	≤ 5 gcm ²
Starting torque	≤ 1.5 Ncm


Shaft load	
Axial	30 N
Radial	50 N

Dimensions

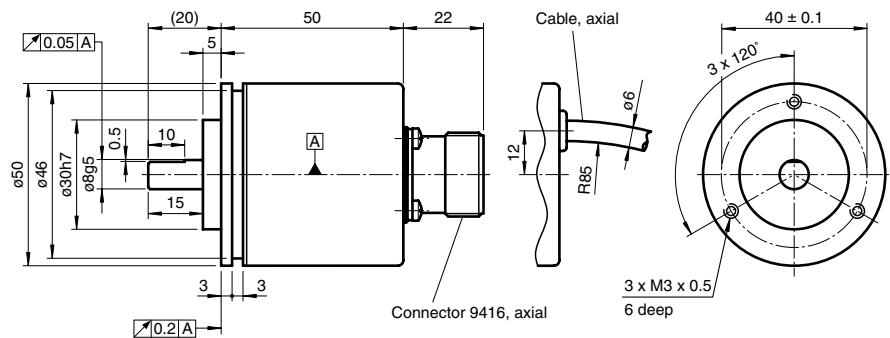


Clamping flange

Electrical connection

Signal	Cable Ø6 mm, 5-core	Connector 9416, 12-pin
GND	Black	8
+U _b	Red	7
A	Green	1
B	White	3
$\bar{A}$	-	2
$\bar{B}$	-	4
0	Yellow	5
$\bar{0}$	-	6
Screen	-	Housing
		

Signal outputs

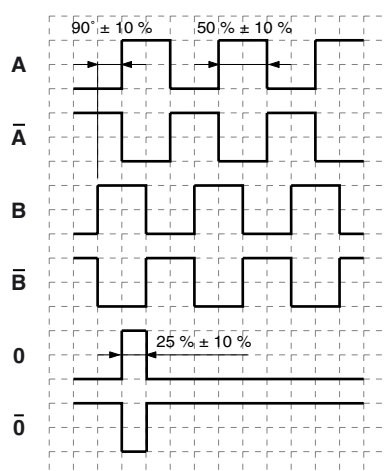

↻ cw - with view onto the shaft

Order code

R	V	I	5	0	N	-	0	9	B			A			N	-											
---	---	---	---	---	---	---	---	---	---	--	--	---	--	--	---	---	--	--	--	--	--	--	--	--	--	--	--

Pulse count 30, 60, 90, 100, 180, 200,
 250, 300, 314, 360, 400, 500,
 600, 720, 900, 1000, 1024,
 1200, 1250, 1440, 1500,
 1800, 2000, 2048, 2400,
 2500

Option
N Normal

Connection type, cable exit, signal output, output switching
AAA3T Connector type 9416, 12-pin, axial,
 A + B + 0, 4.75 V ... 30 V, push-pull
AAA66 Connector type 9416, 12-pin, axial,
 A + B + 0 and $\bar{A} + \bar{B} + \bar{O}$, 5 V, RS 422
K0A3T Cable Ø6 mm, 5 x 0.38 mm², 0.5 m, axial,
 A + B + 0, 4.75 V ... 30 V, push-pull

Flange version
B Clamping flange

Shaft dimension
09 Shaft Ø8 mm x 15 mm

Housing material
N Aluminium, powder coated

Shaft version
V Solid shaft

